



DX 4000

3.4 kW - 4.25 kVA⁽¹⁾ - 230/115 V

YANMAR L70 Diesel engine

Circuit breaker

Run time: 12.6 hours

Weight: 81 kg



Oil safety on diesel generators

With this feature, not only does the engine start and stop with a simple turn of the key but, more importantly, it will not start and will stop of its own accord running if the oil level is too low. Your generator set is fully protected!

Available on the SD 6000 E-2, DX 4000 and DX 6000 E.

NEW



SD 6000 E-2

5.2 kW - 6.5 kVA⁽¹⁾ - 230/115 V

YANMAR L100 Diesel engine

Oil safety • Electric starter

Run time: 19.6 hours

Weight: 192 kg


DX 6000 E

5.2 kW - 6.5 kVA⁽¹⁾ - 230/115 V


YANMAR L100 Diesel engine

Oil safety • Circuit breaker • Electric starter

Run time: 9.2 hours • Weight: 105 kg

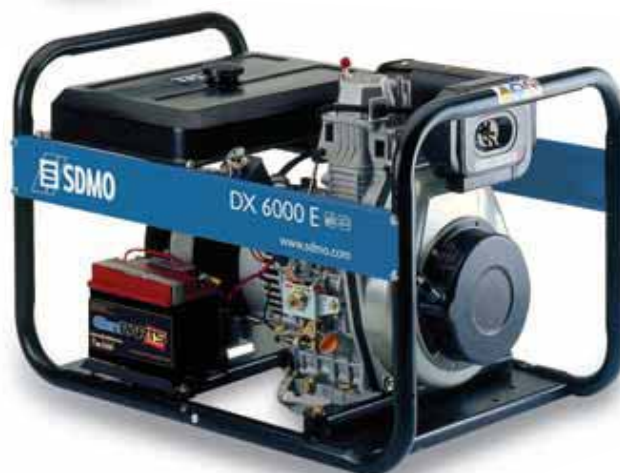

SINGLE PHASE GENERATING SETS

50 hz			Engine							Alternator	EEC Lwa	Noise level dB(A) @ 7 m	Dimensions l x w x h in cm	Weight in Kg	Options			
Type	Max. power 230 V		Brand	Type	Oil safety	Electric start	HP at 3600 rpm	Run time hr.	Tank L	230/115 V Circuit breaker					Trolley kit Trailer	Automatic starter box	Cover	Maintenance kit
	kW ISO 8528	kVA ⁽¹⁾ Cos φ 0.8																
DX 4000	3.4	4.25	Yanmar Diesel	L70	x	x	6.7	12.6	12	•	102	79	87x57x56	81	R07	x	x	
SD 6000 E-2		5.2	6.5	Yanmar Diesel	L100	•	•	10	19.6	26	o	95	72	91x75x111	192	•	R05A	x
DX 6000 E		5.2	6.5	Yanmar Diesel	L100	•	•	10	9.2	12	•	106	83	87x57x56	105	R07	R05A	x

(1) Equivalent max kVA (explanation page 5). x Impossible. • Standard. o Optional. **R05A** Automatic start if there is a power cut (separate panel including automatic changeover contactors, remote control cable and 3 metres of power supply cable). **R07** Trolley kit for > 3 kW. DX 4000 and DX 6000 E generating sets do not conform to the 2000/14/EC directive and should therefore only be used inside a building or in countries where this directive does not apply (EU countries and associated countries).

DIESEL

